



CASE:P16-7 215×115×50mm

S-201W系列单组输出

接线位置：9位 9.5mm端子

L, N : AC输入

⊕ : 接大地


-V : DC输出负端

+V : DC输出正端


输入电压范围 AC input voltage range	85-132VAC/170-264VAC 47-63Hz 240-370VDC
输入电流 Input current	4.5A/115V 2.5A/230V
冲击电流 AC inrush current	冷启动电流 25A/115V 50A/230V Cold-start current 25A/115V 50A/230V
漏电流 Leakage current	<3.5mA/240VAC
直流电压可调范围 DC adjustable range	额定输出电压的±10% ±10% rated output voltage
过载保护 Over load protection	105-150% 切断输出, 自动恢复 105-150% hiccup mode, auto-recovery
过电压保护 Over-voltage protection	115-135%
启动、上升、保持时间 Setup rise hold up time	200ms 100ms 20ms
耐压性 Withstand voltage	I/P-O/P: 1.5KVAC 1minute I/P-FG: 1.5KVAC 1minute O/P-O/P: 0.5KVAC 1minute
工作温度、湿度 Working temperature	-10 ~ +60 .20%-90% RH
重量/包装 Weight/packing	0.9kg.24pcs/21.6kg

型号type	输出Output	差值Error	范围Range	效率Efficiency
S-201-5	5V , 0-40A	±2%	150mV	74%
S-201-7.5	7.5V , 0-26.5A	±2%	150mV	79%
S-201-12	12V , 0-16.5A	±1%	150mV	80%
S-201-13.5	13.5V , 0-14.7A	±1%	150mV	80%
S-201-15	15V , 0-13A	±1%	150mV	81%
S-201-24	24V , 0-6.8.3A	±1%	150mV	83%
S-201-27	27V , 0-7.4A	±1%	200mV	83%
S-201-48	48V , 0-4.2A	±1%	240mV	84%

■ Mechanical Specification

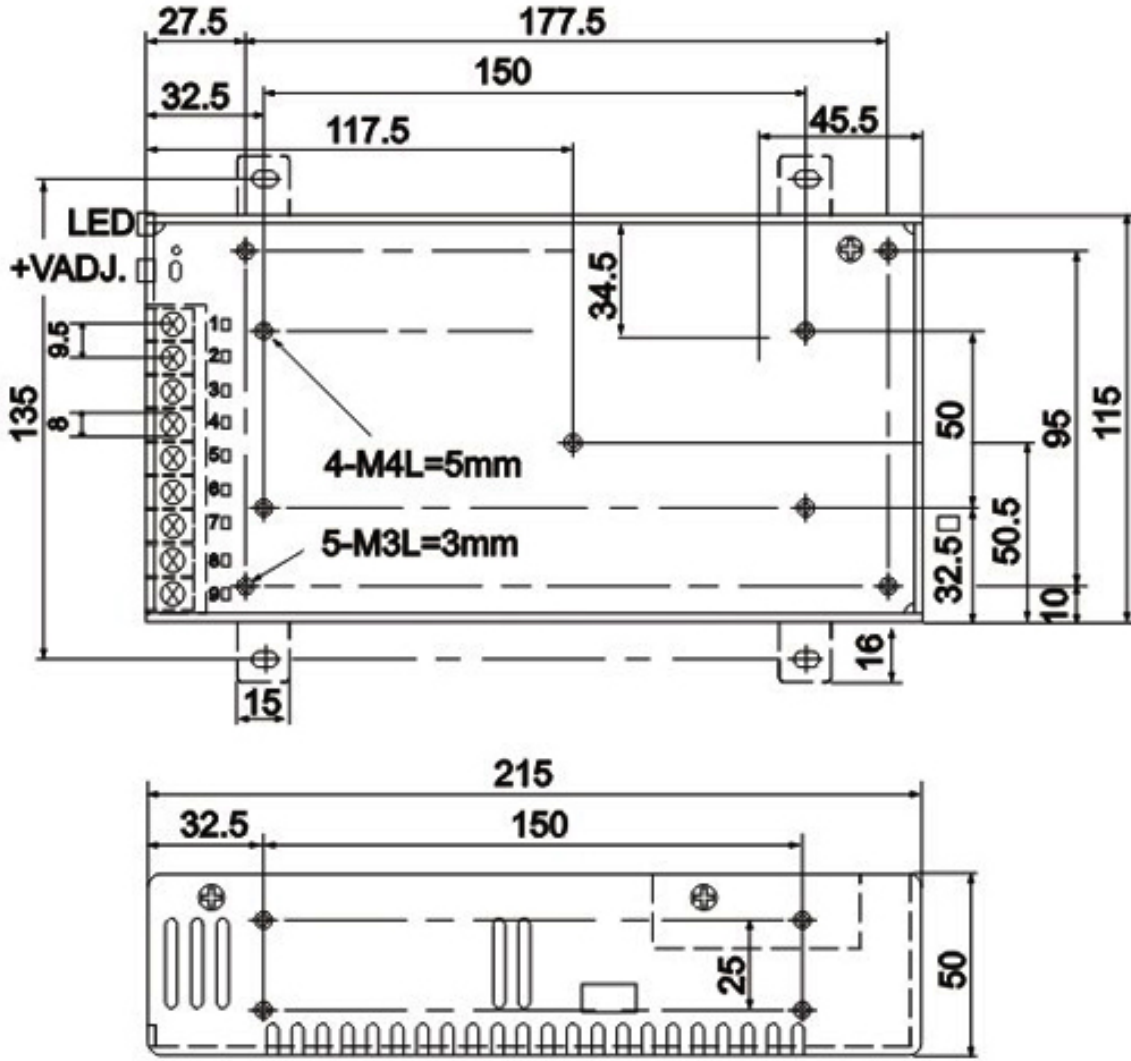

■ Derating Curve

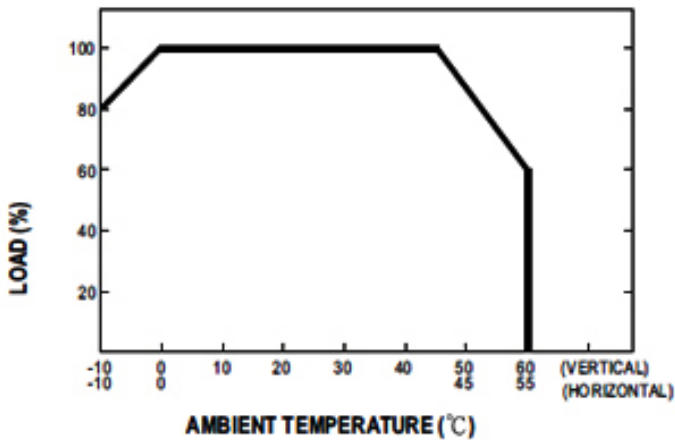

■ Static Characteristics (24V)

